


PRODUCT DATA SHEET


TOUCHÉ CONTROLS



SMART TIMECLOCK MODULE

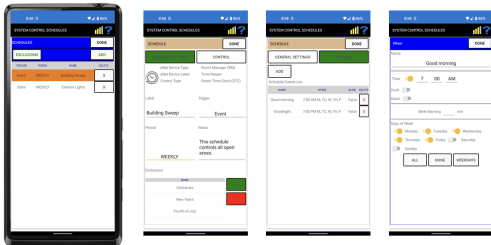

COMPATIBLE WITH FREE v5
iOS & ANDROID APP



MOUNTS TO STANDARD 4" x 4"
ELECTRICAL JUNCTION BOX
(JUNCTION BOX NOT INCLUDED)

DESCRIPTION

Smart Timeclock Modules provide system wide scheduling and timeclock control of all network connected Room Managers. Only a single module is required for building-wide scheduling and override control. Each module is self-addressing — simply plug the module into any Room Manager and the module is ready to operate.

FEATURES

- Smart Load Control Modules are connected to any Room Manager via a standard CAT5 patch cable. No external power is required for the module—it is powered from the CAT5 connection.
- Module uses a GPS signal from the provided GPS sensor to determine the date, local time, and time-zone. No setup is required to calibrate the GPS signal. Simply plug the module in to any near-by Room Manager and the current date and time is transmitted to all other connected Room Managers.
- Configuration of schedules is managed by Touché's free app, Insight™. Insight™ can be used to manipulate system schedules from anywhere in the building as long as there is a networked Room Manager within Bluetooth range of the user.
- Schedule quantity is unlimited and capable of the following:
 - Events: building sweeps and other non-persistent time-based system-wide commands.
 - States: overrides and other building-wide commands that must be maintained irrespective of other locally triggered events.
 - Sequences: building-wide commands that are sequentially triggered from one state to another. This is helpful for modes where time-of-day is relevant.
 - Exclusions: holidays and other custom exclusions where the typical schedule is not to operate.
- Optional photocell for building-wide natural light level control. Calculated astronomical dusk/dawn control included standard with every module.
- Modules can be mounted in plenum ceiling spaces.
- Module mounts to a standard 4" x 4" electrical junction box for simple installation.

Touché Controls (a Product of ESI Ventures)

A: 2085 Humphrey Street, Fort Wayne, IN 46803

T: 888-841-4356

W: ToucheControls.com

Doc: Rev0-1-22


SPECIFICATIONS

| | |
|---------------------|---|
| VOLTAGE | 24VDC - SOURCED FROM BRANCH NETWORK (CAT5 CABLE) (NO EXTERNAL POWER SUPPLY REQUIRED) |
| CAPACITY | LIGHTING: LED, BALLAST-ELECTRONIC, BALLAST-MAGNETIC, HID, INCANDESCENT : 16A PLUG-LOAD : 20A |
| CONNECTIVITY | CAT5 (MINIMUM) |
| AMBIENT TEMPERATURE | 50C (122F) |
| MAXIMUM HUMIDITY | 10 - 90%, NON-CONDENSING |
| ENCLOSURE | MOUNTS TO A STANDARD 4"X4" ELECTRICAL JUNCTION BOX (EXTENSION RING INCLUDED) |

CATALOGUE NUMBER

| DEVICE TYPE | CONFIGURATION |
|-----------------------------------|-------------------------------------|
| STC Smart Timeclock Module | [Blank] No Photocell Control |
| | PC Photocell Control |

CONNECTIVITY

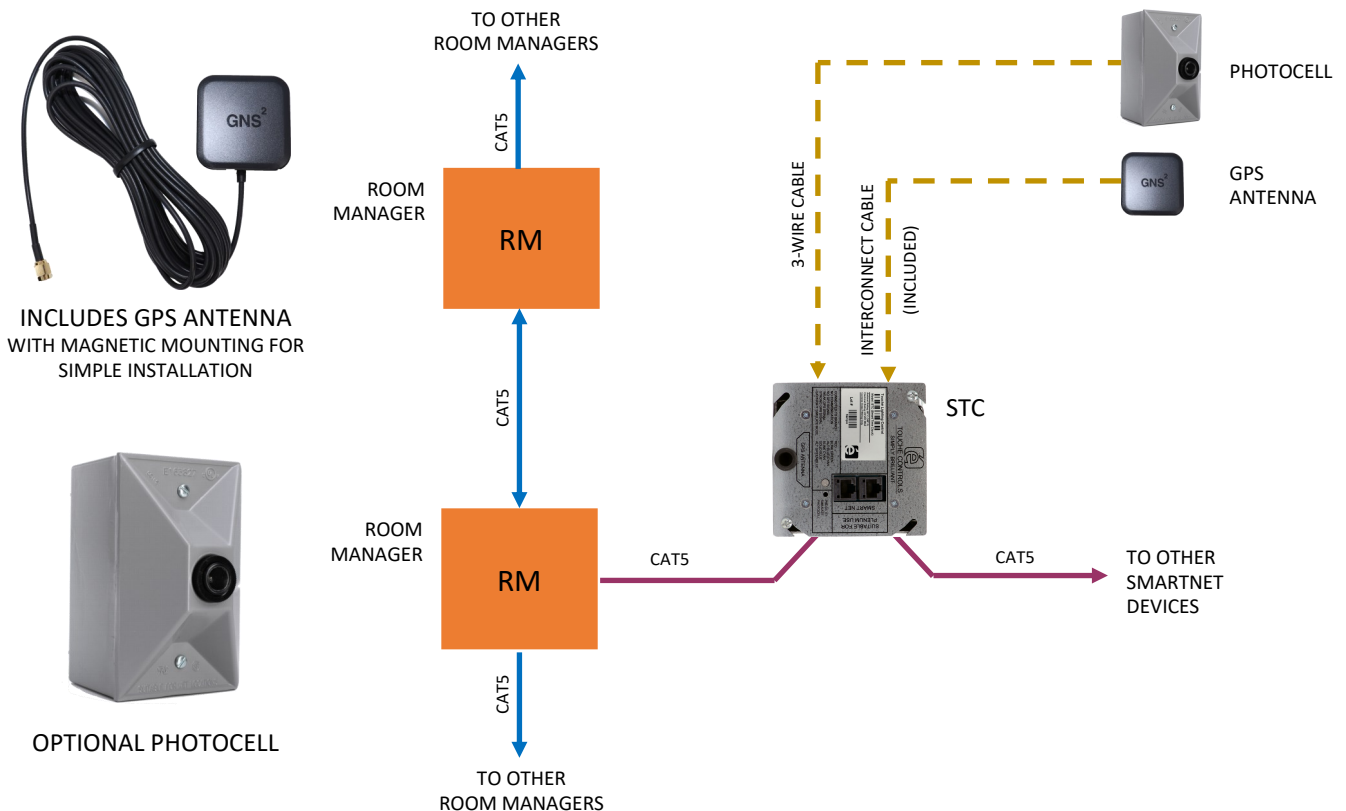

Touché Controls (a Product of ESI Ventures)

A: 2085 Humphrey Street, Fort Wayne, IN 46803 **T:** 888-841-4356

W: ToucheControls.com

Doc: Rev0-1-22