

PRODUCT DATA SHEET

TOUCHÉ CONTROLS



WALL STATION - COLOR TOUCHSCREEN




DESCRIPTION

The WS-TS-C is a configurable wall station with a color touchscreen display. This wall station utilizes a high resolution backlit display for easy to read button information. A simple gesture page swipe is used to switch pages between scene control and zone control.

FEATURES

- Each wall station is configurable with multiple buttons per page and multiple pages per wall station.
- Default pages include: scenes page, zones page, and special function page. Unused pages, or pages that include functionality that is not desired, can be hidden.
- Switch lockout feature requires a 4-digit pass code for access to the switch's functions, when enabled.
- Multiple button types including: scene selection, zone selection, and momentary action. Each button supports pre-defined and user-defined labels.
- Display is a 4.3" TFT display, 272x480, premium brightness, 16.7M colors.
- Capacitive multi-touch interface with page swipe gesture control.
- Dimmable backlight, Sleep mode capable.
- Fully integrated with other components of the system to properly display the current state of the lighting in the controlled area. Coordination is automatically generated through the easy-to-use Windows® based system configuration software for master interface based systems or via the Touché Room Manager smart phone application for room manager based systems.
- All power and communication is done through a low voltage CAT5 daisy-chained cable. No additional cabling or sources of power are required.
- Switches fit into standard single-gang electrical junction boxes (junction box not included).

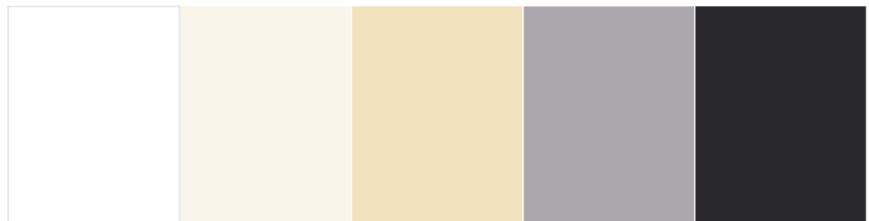

WHITE

LGT ALMOND

IVORY

GRAY

BLACK

Touché Controls (a Product of ESI Ventures)

A: 2085 Humphrey Street, Fort Wayne, IN 46803

T: 888-841-4356

W: ToucheControls.com

Doc: Rev1-1-22

SPECIFICATIONS

| | |
|----------------------|--|
| POWER SUPPLY VOLTAGE | 24VDC - SOURCED FROM BRANCH-NET (NO EXTERNAL POWER SUPPLY REQUIRED) |
| CONNECTIVITY | CAT5 (MINIMUM) |
| LISTINGS | UL916, cUL916 |
| AMBIENT TEMPERATURE | 60C (140F) |
| MAXIMUM HUMIDITY | 10 - 90%, NON-CONDENSING |

CATALOGUE NUMBER

| DEVICE TYPE | CONFIGURATION | DISPLAY TYPE | COLOR |
|------------------------|-----------------------|----------------|--|
| WS Wall-station | TS Touchscreen | C Color | WHT White LA Light-Almond IV Ivory GRY Gray BLK Black |

CONNECTIVITY

